





Cyclonator®

Features

- *Built-in regenerative blower provides suction to recover water from steel racks, in-ground sumps or mats*
- “One button” operation
- Stainless steel
- 200-gallons of mud settling
- NEMA 4 electrics
- PLC controlled
- Continuous ozone injection
- Oil Coalescing
- Automatic oil skimmer
- Absolute filtration to 5 micron
- 24/7 Continuous recirculation

Specifications

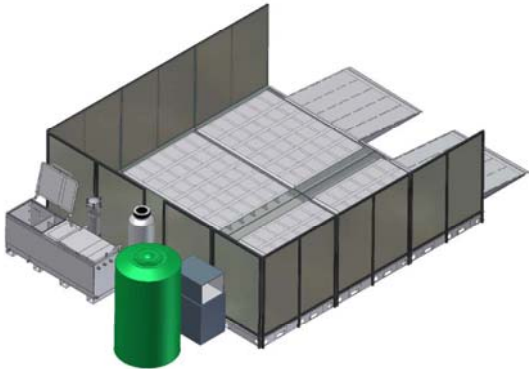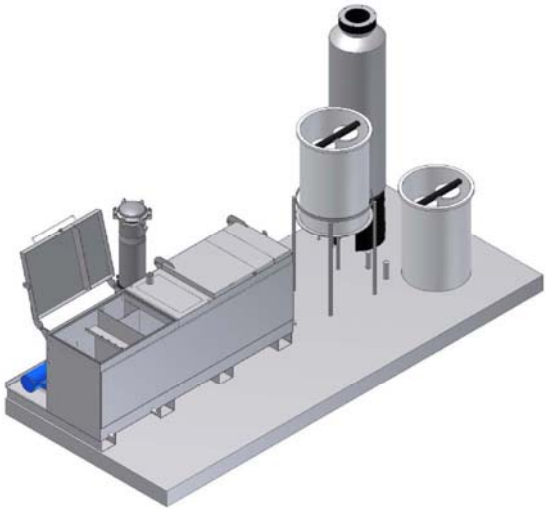

Capacity	250 gallons plus holding tank
Weight	1200lbs.
Dimensions	102”L x 48”W x 50”H
Electric	208, 240, 480 single or three phase
Process Rate	0 – 20 GPM
PSI	80 – 15,000
GPM	4 - 80
Material	304 stainless steel